


# SD100

## Liquid Cooled Diesel Engine Generator Sets

Standby Power Rating  
100KW 60 Hz / 100KVA 50 Hz

Prime Power Rating  
80KW 60 Hz / 80KVA 50 Hz

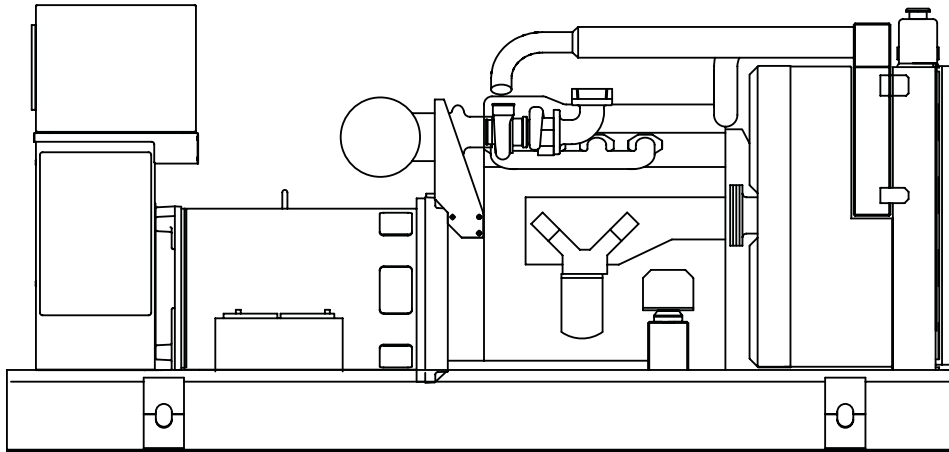

Power Matched  
**GENERAC 3.9DTA ENGINE**  
Turbocharged / Aftercooled

## FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**
  - ✓ PROTOTYPE TESTED
  - ✓ SYSTEM TORSIONAL TESTED
  - ✓ ELECTRO-MAGNETIC INTERFERENCE
  - ✓ NEMA MG1 EVALUATION
  - ✓ MOTOR STARTING ABILITY
  - ✓ SHORT CIRCUIT TESTING
  - ✓ UL COMPLIANCE AVAILABLE
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized
- FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own a GENERAC POWER SYSTEM.
- **ECONOMICAL DIESEL POWER.** Low cost operation due to modern diesel engine technology. Better fuel utilization plus lower cost per gallon provide real savings.
- **LONGER ENGINE LIFE.** Generac heavy-duty diesels provide long and reliable operating life.
- **GENERAC TRANSFER SWITCHES, SWITCHGEAR AND ACCESSORIES.** Long life and reliability is synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems, accessories, switchgear and controls for total system compatibility.

**GENERAC**<sup>®</sup>  
POWER SYSTEMS, INC.

# APPLICATION & ENGINEERING DATA

SD100

## GENERATOR SPECIFICATIONS

TYPE .....	Four-pole, revolving field
ROTOR INSULATION .....	Class H
STATOR INSULATION .....	Class H
TOTAL HARMONIC DISTORTION .....	<3%
TELEPHONE INTERFERENCE FACTOR (TIF) .....	<50
ALTERNATOR .....	Self-ventilated and drip-proof
BEARINGS (PRE-LUBED & SEALED) .....	1
COUPLING .....	Direct, Flexible Disc
LOAD CAPACITY (STANDBY) .....	100%
LOAD CAPACITY (PRIME) .....	110%

**NOTE: Emergency loading in compliance with NFPA 99, NFPA 110. Generator rating and performance in accordance with ISO8528-5, BS5514, SAE J1349, ISO3046 and DIN6271 standards.**

### EXCITATION SYSTEM

<input type="checkbox"/> BRUSHLESS .....	Magnetically coupled DC current ✓
	Eight-pole exciter w/ battery-driven field boost ✓
	Mounted outboard of main bearing ✓
<input type="checkbox"/> PERMANENT MAGNET EXCITER .....	Eighteen pole exciter ✓
	Magnetically coupled DC current ✓
	Mounted outboard of main bearing ✓
REGULATION .....	Solid-state ✓
	±1% regulation ✓

## GENERATOR FEATURES

- Four pole, revolving field generator, directly connected to the engine shaft through a heavy-duty, flexible disc for permanent alignment.
- Generator meets the temperature rise standards for class "F" insulation as defined by NEMA MG1-32.6, while the insulation system meets the requirements for the higher class "H" rating.
- All prototype models have passed a three-phase symmetrical short circuit test to assure system protection and reliability.
- All prototype models are tested for motor starting ability by measuring the instantaneous voltage dip with a waveform data acquisition system.
- All models utilize an advanced wire harness design for reliable interconnection within the circuitry.
- Magnetic circuit, including amortisseur windings, tooth and skewed stator design, provides a minimal level of waveform distortion and an electromagnetic interference level which meets accepted requirements for standard AM radio, TV, and marine radio telephone applications.
- Voltage waveform deviation, total harmonic content of the AC waveform, and T.I.F. (Telephone Influence Factor) have been evaluated to acceptable standards in accordance with NEMA MG1-32.
- Alternator is self-ventilated and drip-proof constructed.
- Fully life-tested protective systems, including "field circuit and thermal overload protection" and optional main-line circuit breakers capable of handling full output capacity.
- System Torsional acceptability confirmed during Prototype Testing.

## ENGINE SPECIFICATIONS

MAKE .....	GENERAC
MODEL .....	3.9DTA
CYLINDERS .....	4 in-line
DISPLACEMENT .....	3.9 Liter (238 cu.in.)
BORE .....	104 mm (4.09 in.)
STROKE .....	115 mm (4.52 in.)
COMPRESSION RATIO .....	16.5:1
INTAKE AIR .....	Turbocharged/Aftercooled
NUMBER OF MAIN BEARINGS .....	5
CONNECTING RODS .....	4-Drop Forged Steel
CYLINDER HEAD .....	Cast Iron Overhead Valve
PISTONS .....	4- Aluminum Alloy
CRANKSHAFT .....	Hardened, Steel

### VALVE TRAIN

LIFTER TYPE .....	Solid
INTAKE VALVE MATERIAL .....	Special Heat Resistant Steel
EXHAUST VALVE MATERIAL .....	Special Heat Resistant Steel
HARDENED VALVE SEATS .....	Replaceable

### ENGINE GOVERNOR

<input type="checkbox"/> ELECTRONIC .....	Standard
FREQUENCY REGULATION, NO-LOAD TO FULL LOAD..	Isosynchronous
STEADY STATE REGULATION .....	±0.25%

### LUBRICATION SYSTEM

TYPE OF OIL PUMP .....	Gear
OIL FILTER .....	Full flow, Cartridge
CRANKCASE CAPACITY .....	18 Litres (19 qts.)
OIL COOLER .....	Oil to water

### COOLING SYSTEM

TYPE OF SYSTEM .....	Pressurized, Closed Recovery
WATER PUMP .....	Pre-Lubed, Self-Sealing
TYPE OF FAN .....	Pusher
NUMBER OF FAN BLADES .....	7
DIAMETER OF FAN .....	457 mm (18 in.)
COOLANT HEATER .....	120V, 1800 W

### FUEL SYSTEM

FUEL .....	#2D Fuel (Min Cetane #40) (Fuel should conform to ASTM Spec.)
FUEL FILTER .....	Single Cartridge
FUEL INJECTION PUMP .....	Stanadyne
FUEL PUMP .....	Mechanical
INJECTORS .....	Multi-Hole, Nozzle Type
ENGINE TYPE .....	Direct Injection
FUEL LINE (Supply) .....	7.94 mm (0.31 in.)
FUEL RETURN LINE .....	6.35 mm (0.25 in.)
STARTING AID .....	Glow Plugs

### ELECTRICAL SYSTEM

BATTERY CHARGE ALTERNATOR .....	30 Amps at 24 V
STARTER MOTOR .....	24 V
RECOMMENDED BATTERY .....	(2)—12 Volt, 90 A.H., 4DLT
GROUND POLARITY .....	Negative

Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). Prime (Unlimited Running Time): Applicable for supplying electric power in lieu of commercially purchased power. Prime power is the maximum power available at variable load. A 10% overload capacity is available for 1 hour in 12 hours. (All ratings in accordance with BS5514, ISO3046, ISO8528 and DIN6271).

**SD100**

**OPERATING DATA**

	<b>STANDBY</b>		<b>PRIME</b>	
	<b>SD100</b>		<b>SD100</b>	
<b>GENERATOR OUTPUT VOLTAGE/KW-60Hz</b>		<u>Rated AMP</u>		<u>Rated AMP</u>
120/240V, 1-phase, 1.0 pf	100	417	80	333
120/208V, 3-phase, 0.8 pf	100	347	80	278
120/240V, 3-phase, 0.8 pf	100	301	80	241
277/480V, 3-phase, 0.8 pf	100	150	80	120
600V, 3-phase, 0.8 pf	100	120	80	96
<b>GENERATOR OUTPUT VOLTAGE/KVA-50Hz</b>		<u>Rated AMP</u>		<u>Rated AMP</u>
110/220V, 1-phase, 1.0 pf	80	364	64	291
115/200V, 3-phase, 0.8 pf	100	289	80	231
100/200V, 3-phase, 0.8 pf	100	289	80	231
231/400V, 3-phase, 0.8 pf	100	144	80	115
480V, 3-phase, 0.8 pf	100	120	80	77
<b>MOTOR STARTING KVA</b>				
Maximum at 35% instantaneous voltage dip with standard alternator; 50/60 Hz	<u>120/208/240V</u>	<u>277/480V</u>	<u>120/208/240V</u>	<u>277/480V</u>
with optional alternator; 50/60 Hz	175/210 234/281	212/254 276/331	175/210 234/281	212/254 276/331
<b>FUEL</b>				
Fuel consumption—60 Hz	Load	<u>100%</u>	<u>80%</u>	<u>100%</u>
	gal./hr.	6.7	5.6	5.4
	liters/hr.	25.4	21.0	20.3
Fuel consumption—50 Hz	gal./hr.	5.6	4.6	4.4
	liters/hr.	21.0	17.5	16.8
Fuel pump lift		36"		36"
<b>COOLING</b>				
Coolant capacity	System - lit. (US gal.)	15.9 (4.2)		15.9 (4.2)
	Engine - lit. (US gal.)	6.4 (1.7)		6.4 (1.7)
	Radiator - lit. (US gal.)	9.5 (2.5)		9.5 (2.5)
Coolant flow/min.	60 Hz - lit. (US gal.)	128 (34)		128 (34)
	50 Hz - lit. (US gal.)	107 (28)		107 (28)
Heat rejection to coolant 60 Hz full load	BTU/hr.	269,500		215,600
Heat rejection to coolant 50 Hz full load	BTU/hr.	224,500		179,600
Inlet air	60 Hz - m <sup>3</sup> /min. (cfm)	204 (7200)		204 (7200)
	50 Hz - m <sup>3</sup> /min. (cfm)	170 (6004)		170 (6004)
Max. operating air temp to radiator *see note	°C (°F)	60 (140)		60 (140)
Max. operating ambient temp *see note	°C (°F)	50 (122)		50 (122)
<b>COMBUSTION AIR REQUIREMENTS</b>				
Flow at rated power	60 Hz - cfm	334		270
	50 Hz - m <sup>3</sup> /min.	7.5		6.0
<b>EXHAUST</b>				
Exhaust flow at rated output	60 Hz - m <sup>3</sup> /min. (cfm)	28.5 (1005)		22.8 (804)
	50 Hz - m <sup>3</sup> /min. (cfm)	23 (812)		18 (636)
Max recommended back pressure	"Hg	1.5		1.5
Exhaust temperature 60 Hz (full load)	°C (°F)	638 (1180)		559 (1038)
Exhaust outlet size		3.0"		3.0"
<b>ENGINE</b>				
Rated RPM	60 / 50 Hz	1800 / 1500		1800 / 1500
HP at rated KW	60 / 50 Hz	147 / 117		119 / 94
Piston speed	60 Hz - m/min. (ft./min.)	414 (1358)		414 (1358)
	50 Hz - m/min. (cfm)	345 (1132)		345 (1132)
BMEP	60 / 50 Hz - psi	272 / 259		219 / 209
<b>POWER ADJUSTMENTS FOR AMBIENT CONDITIONS</b>				
Temperature				
	-4.5% for every 10°C above - °C	40		40
	-2.5% for every 10°F above - °F	104		104
Altitude				
	-0.8% for every 100 m above - m	150		150
	-2.5% for every 1000 ft. above - ft.	500		500

\*Note: Values given are maximum temperatures to which power adjustments can be applied. Consult your Generac Power Systems representative if operating conditions exceed these maximums.

- High Coolant Temperature Automatic Shutdown
- Low Coolant Level Automatic Shutdown
- Low Oil Pressure Automatic Shutdown
- Overspeed Automatic Shutdown (Solid-state)
- Crank Limiter (Solid-state)
- Oil Drain Extension
- Radiator Drain Extension
- Factory-Installed Cool Flow Radiator
- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Rubber-Booted Engine Electrical Connections
- Secondary Fuel Filter
- Fuel Lockoff Solenoid
- Stainless Steel Flexible Exhaust Connection
- Battery Charge Alternator
- Battery Cables
- Battery Tray
- Vibration Isolation of Unit to Mounting Base
- 24 Volt, Solenoid-activated Starter Motor
- Air Cleaner
- Fan Guard
- Control Console
- Coolant Heater
- Radiator Duct Adapter

## OPTIONS

- **OPTIONAL COOLING SYSTEM ACCESSORIES**
  - 208/240V Coolant Heater
- **OPTIONAL FUEL ACCESSORIES**
  - Flexible Fuel Lines
  - UL Listed Fuel Tanks
  - Base Tank Low Fuel Alarm
  - Primary Fuel Filter
  - Primary Fuel Filter with Heater
- **OPTIONAL EXHAUST ACCESSORIES**
  - Critical Exhaust Silencer (Standard on enclosed genset)
- **OPTIONAL ELECTRICAL ACCESSORIES**
  - 2A Battery Charger
  - 10A Dual Rate Battery Charger
  - Battery, 12 Volt, 135 A.H.
- **OPTIONAL ALTERNATOR ACCESSORIES**
  - Alternator Upsizing
  - Alternator Strip Heater
  - Alternator Tropicalization
  - Voltage Changeover Switch
  - Main Line Circuit Breaker
- **CONTROL CONSOLE OPTIONS**
  - Digital Controller H100 (Bulletin 0172110SBY)
- **ADDITIONAL OPTIONAL EQUIPMENT**
  - Automatic Transfer Switch
  - Isochronous Governor
  - 3 Light Remote Annunciator
  - 5 Light Remote Annunciator
  - 20 Light Remote Annunciator
  - Remote Relay Panels
  - Unit Vibration Isolators (Pad/Spring)
  - Oil Make-Up System
  - Oil Heater
  - 5 Year Warranties
  - Export Boxing
  - GenLink® Communications Software
- **OPTIONAL ENCLOSURE**
  - Weather Protective
  - Sound Attenuated
  - Aluminum and Stainless Steel
  - Enclosed Muffler

**Distributed by:**

